


01 - Folding Gate

Single or Double




1. Folding Gate - Specifications

- » Folding gates can be installed on doors and windows and can be constructed in any requested dimensions.
- » Fully assembled with rivets and screws (without welding), for a higher resistance to corrosion.
- » Galvanized or Powder Coated in 27 standard RAL tints.
- » All the components are made of hot-dip galvanized steel
- » The nylon coating of the bearing and the nylon distance rings provide silent operation of the folding gate.
- » The frame is constructed in such a way that makes it impossible to pick the lock from the external side (mortice lock providing higher security).



▶ MORTICE LOCK

The lock is fixed in the mullion with only one side visible. This way the lock cannot be breached, thus stopping any attempt of burglary.

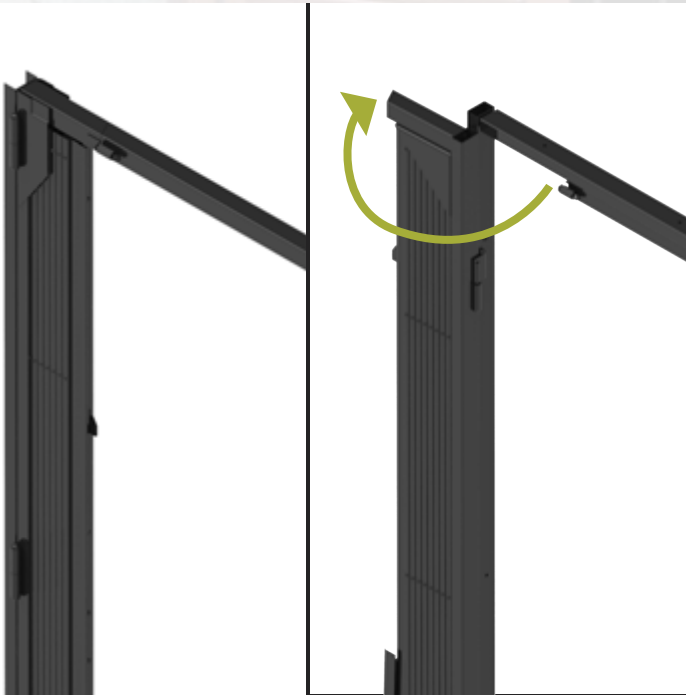

CLEAR OPENING

The Folding Collapsible Gate type can be used when the full width of the door needs to be available. The lower part of the door can be folded and turned 180 degrees leaving the door opening completely free

- » **3 mm thick hot-dip galvanized steel "x" blades**
- » **1,5mm or 1,25mm thick vertical bars**
- » **Silent operation** with intermediate teflon.
- » **Clear opening** (opening mechanism 180° degrees).
- » **High Security** with a Mortice lock.
- » **Entirely Galvanized Construction without welding.**
- » **Big range of powder coated RAL colors.**
- » **Removable bottom rail** (floor free of obstacle).
- » **Corrosion resistant**
- » **Minimum maintenance**

EN 13241-1

